

CTO-Q10 CARTRIDGE

REPLACEMENT CARTRIDGE

CTO-Q10: 300-05828
Systems Cartridge Used In: QT10-1 160-52009*



APPLICATIONS

- ◆ Fountain beverages
- ◆ Water
- ◆ Coffee and tea

FEATURES • BENEFITS

- ◆ Improves the quality and consistency of cold and hot beverages
- ◆ Reduces maintenance frequency and cost, and extends equipment life
- ◆ Gradient-density depth filtration reduces dirt, rust, and other debris as small as 2 microns to assure clean, clear water and protect solenoids, valves and other fittings against wear and plugging†
- ◆ Activated carbon filtration makes water taste better†
- ◆ High capacity cartridge extends filter system life reducing maintenance frequency
- ◆ 1/4 turn QT Qwik-Twist bayonet cartridge makes changing the filter quick, easy and sanitary

INSTALLATION TIPS

- ◆ Ensure cartridge is designed to replace the existing cartridge.
- ◆ Feed-water connection to system should be COLD only.
- ◆ Do not exceed system specifications for temperature and pressure.
- ◆ Allow 3" clearance below system for filter housing removal and cartridge replacement.

OPERATION TIPS

- ◆ Change cartridges on a regular six (6) month preventative maintenance program.
- ◆ Change cartridges when capacity is reached or when flow becomes too slow.
- ◆ Always flush the filter cartridge at time of installation and cartridge change.

SIZING

- ◆ Service Flow Rate: 1.5 gpm (5.7 lpm)
- ◆ Rated Capacity: 15,000 gals. (56,775 L)

* Not performance tested or certified by NSF


† As tested by Pentair

CTO-Q10 CARTRIDGE

300-05828

CTO-Q10: 300-05828

Systems Cartridge Used In: QT10-1 160-52009*

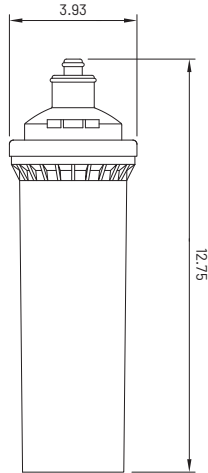

SPECIFICATIONS

- ◆ **Service Flow Rate**
Maximum 1.5 gpm (5.7 Lpm)
- ◆ **Rated Capacity**
15,000 gals. (56,775 L)
- ◆ **Pressure Requirements**
10 – 125 psi (0.7 – 8.6 bar)
- ◆ **Temperature**
35 – 100°F (2 – 38°C)
- ◆ **Overall Dimensions**
12.75" L x 4" W x 4" D
(32.3 cm x 10.16 cm x 10.16 cm)
- ◆ **Electrical Connection**
None required



CTO-Q10 is Tested and Certified by NSF International against NSF/ANSI 42 for materials and structural requirements.

WARRANTY

Everpure water treatment systems by Pentair (excluding replaceable elements) are covered by a limited warranty against defects in material and workmanship for a period of five years after date of purchase. Everpure replaceable elements (filter cartridges and water treatment cartridges) are covered by a limited warranty against defects in material and workmanship for a period of one year after date of purchase. See printed warranty for details. Pentair will provide a copy of the warranty upon request.

The contaminants or other substances removed or reduced by this drinking water system are not necessarily in your water. Do not use with water that is microbiologically unsafe or of unknown quality without adequate disinfection before or after the system.

Since the conditions under which our products may be used are beyond our control, we cannot accept any liability with respect to the improper installation, application and/or use of our products.

* Not performance tested or certified by NSF



United States | 1040 Muirfield Drive | Hanover Park, IL 60133 | 800.942.1153 (US Only) 630.307.3000 Main | cseverpure@pentair.com | foodservice.pentair.com

Australia | 1-21 Monash Drive | Dandenong South, Vic 3175 | Australia | 011.1300 576 190 Tel | au.everpure@pentair.com

China | 21F Cloud 9 Plaza, NO 1118 | Shanghai, 200052 | China | 86.21.3211.4588 Tel | china.water@pentair.com

India | Boulevard, B-9/A, 7th Floor - Tower B Sector 62 | Noida - 201301 | 91.120.419.9444 Tel | indiacustomer@pentair.com

Europe | Pentair Water Belgium BV | Industriepark Wolfstee, Toekomstlaan 30, B-2200 Herentals | Belgium | +32.(0).14.283.504 Tel | sales@everpure-europe.com

Southeast Asia | 390 Havelock Road, | #04-01 King's Centre | Singapore 169662 | 65.6768.5800 Tel | cseverpure@pentair.com

All indicated Pentair trademarks and logos are property of Pentair. Third party registered and unregistered trademarks and logos are the property of their respective owners.

©2025 Pentair. All Rights Reserved.

300-05828 JL25