

# ENDURANCE® SC HIGH FLOW QUAD CARTRIDGE KIT

System Part Number: EV9628-82

Includes 4 - SEN, 1 - 2SR-BW



## FEATURES • BENEFITS

- ◆ Exclusive Fibredyne™ II media provides chlorine taste and odor reduction and micro-filters dirt and particles as small as 0.2\* micron
- ◆ Easy, quick change filter cartridges
- ◆ Helps minimize equipment clogging, corrosion, and abrasion to ensure optimum equipment performance
- ◆ Balanced cartridge for optimal performance in varying water qualities
- ◆ Utilize Everpure 2SR-BW Phosphate Cartridge for scale reduction†
- ◆ NSF/ANSI Standard 53 certified to reduce cysts such as Cryptosporidium and Giardia by mechanical means
- ◆ NSF/ANSI Standard 401 certified for Microplastics Reduction
- ◆ Proprietary Fibredyne II filtration media effectively inhibits the growth of bacteria on the filter media that can decrease product life.

## APPLICATIONS

- ◆ Replacement cartridge kit for Everpure Endurance SC high flow quad system
- ◆ Fountain beverages
- ◆ Multiple applications

\* Validated by ISO 17025 accredited lab for 99.999% reduction of *Pseudomonas diminuta* following the ASTM F838-05 protocol for the validation of 0.2 µm sterilizing grade filters.

† As tested by Pentair.


EPA No. 002623-IL-002

## INSTALLATION TIPS

- ◆ Install vertically and allow 5" (12.7 cm) clearance below the cartridges for easy removal and replacement.
- ◆ Flush cartridges by running water through the filter for five (5) minutes.
- ◆ Change cartridges when capacity is reached or when pressure falls below 10 psi (0.7 bar).
- ◆ It is recommended to replace cartridges at least once a year.

# ENDURANCE® SC HIGH FLOW QUAD CARTRIDGE KIT

EV9628-82

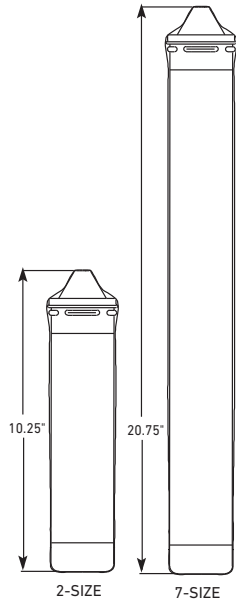

## Specifications

### Rated Service Flow

15 gpm (56.8 Lpm)

### Rated Capacity

200,000 gallons (757,082 L)

### Operating Pressure

10 - 100 psi (0.7 - 6.9 bar), non-shock

### Water Temperature

35 - 100°F (2 - 38°C)

### Shipping Weight

17 lbs (7.70 kgs)

For Pentair Everpure Product Warranties visit:  
<http://pentair.com/assets/foodservice-warranty>

The contaminants or other substances removed or reduced by this drinking water system are not necessarily in your water. Do not use with water that is microbiologically unsafe or of unknown quality without adequate disinfection before or after the system.

Since the conditions under which our products may be used are beyond our control, we cannot accept any liability with respect to the improper installation, application and/or use of our products.

Endurance SC High Flow Quad Tested and Certified by NSF International against NSF/ANSI Standards 42, 53, and 401 for the reduction of:

STANDARD NO. 42 –  
AESTHETIC EFFECTS

Bacteriostatic Effects

Chemical Reduction

Taste & Odor

Chlorine

Mechanical Filtration

Nominal Particulate Class I

STANDARD NO. 53 –  
HEALTH EFFECTS

Mechanical Filtration

Cyst

Turbidity

STANDARD NO. 401 –  
EMERGING COMPOUNDS  
/ INCIDENTAL  
CONTAMINANTS

Mechanical Filtration  
Microplastics



1040 Muirfield Drive | Hanover Park, IL 60133 | 800.942.1153 (US Only) 630.307.3000 Main | [cseverpure@pentair.com](mailto:cseverpure@pentair.com) | [foodservice.pentair.com](http://foodservice.pentair.com)

All indicated Pentair trademarks and logos are property of Pentair. Third party registered and unregistered trademarks and logos are the property of their respective owners.

©2023 Pentair. All rights reserved.

EV9628-82 AU23